


Conduit Fittings

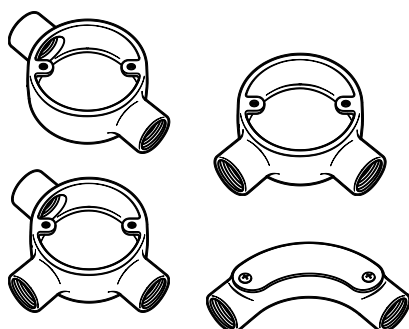

Features

- Hot dipped galvanised inside and out to class 4
- Available for different conduit sizes
- Circular boxes have position for earth terminal

Technical Specification

Material	Malleable Iron, Steel & Brass
Manufacturing Process	Cast
Resistance against corrosion	Hot dipped galvanised to BS EN 61386 Class 4
Lid thread size	M4

Standards

- BS 4568 – 2
Steel Conduit and Fittings with Metric threads
- BS 61386 – 21
Requirements - Rigid Conduit Systems

Storage

Galvanised conduit should be stored in dry conditions to prevent the build up of white rust (wet storage stain). Should this occur, it can be removed and is unlikely to affect the conduits resistance against corrosion.

Description

A range of conduit fittings for electrical cable management, offering a high level of mechanical strength.

A wide range of conduit boxes are available in different configurations to suit any installation requirement.

Range

Malleable

Terminal	20, 25 & 32mm
Through	20, 25 & 32mm
Angle	20 & 25 mm
Tee	20, 25 & 32mm
Intersection	20 & 25 mm
U, Y, H	20 & 25 mm
Terminal with back outlet	20 & 25 mm
Through with back outlet	20 & 25 mm
Angle with back outlet	20mm
Tee with back outlet	20mm
Angle extension	20mm
Tangent angle	20 & 25mm
Tangent Tee	20 & 25mm
Female Dome covers	20 & 25mm
Distance Saddles	20, 25 & 32mm
Hospital Saddles	20, 25 & 32mm
Flanged Couplers	20, 25 & 32mm

Steel

Couplers	20, 25 & 32mm, 1½", 2"
Loop in steel boxes	20mm
Inspection bends & elbows	20 & 25mm
Saddles	20, 25 & 32mm
Steel lids	
Lock nuts and rings	20, 25 & 32mm, 1½", 2"
Nipples	20, 25 & 32mm
Adaptor	¾" M x 20mm F, 20mm M x ¾", 1" M x 25mm F, 25mm M x 1" F
Extension Rings	13,16,20,25,32,38,50mm
Reducer	20 x 16mm, 25 x 20mm, 32 x 20mm, 32 x 25mm
Hex Plugs	16, 20, 25 & 32mm, 1.5", 2"

Brass

Bushes	20, 25 & 32mm, 1½", 2"
Slotted Plugs	20, 25 & 32mm
TRS Glands	20, 25 & 32mm
Earth Terminal	M4