

HERCULOUS OPEN AREA HIGH OUTPUT WORKLIGHT WITH 13A POWER SOCKET


Product Features

- Hard-wearing and durable aluminium die cast housing
- IK07 Polycarbonate Diffuser
- USB-A and USB-C socket entry
- UK Socket input for onsite power extension
- Easy grip carry handle and hanging hook
- 2 light output modes
- Storable 3m H07RN-F 3G1.5mm cable with UK plug



CAT NO.	LUMINAIRE LUMENS	WATTAGE
LWHOA70G65UK	7150lm	66W

Product Drawing

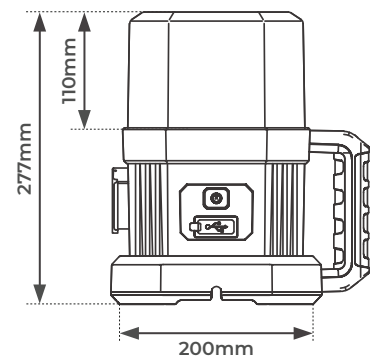

CAT NO.	WEIGHT (kg)	WATTAGE	LUMINAIRE LUMENS (lm)	COLOUR TEMP.	CRI	FREQUENCY (Hz)	IK RATING	IP RATING	LIFESPAN (hrs)
LWHOA70G65UK	1.6	66W	7150	6500K	≥80	50-60	IK07	IP54	20,000

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-4	Luminaires – Portable general purpose luminaires
61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

